

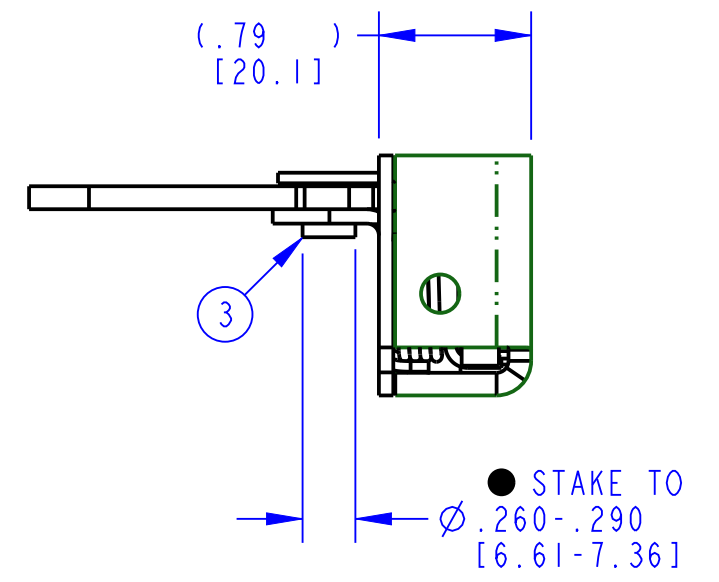
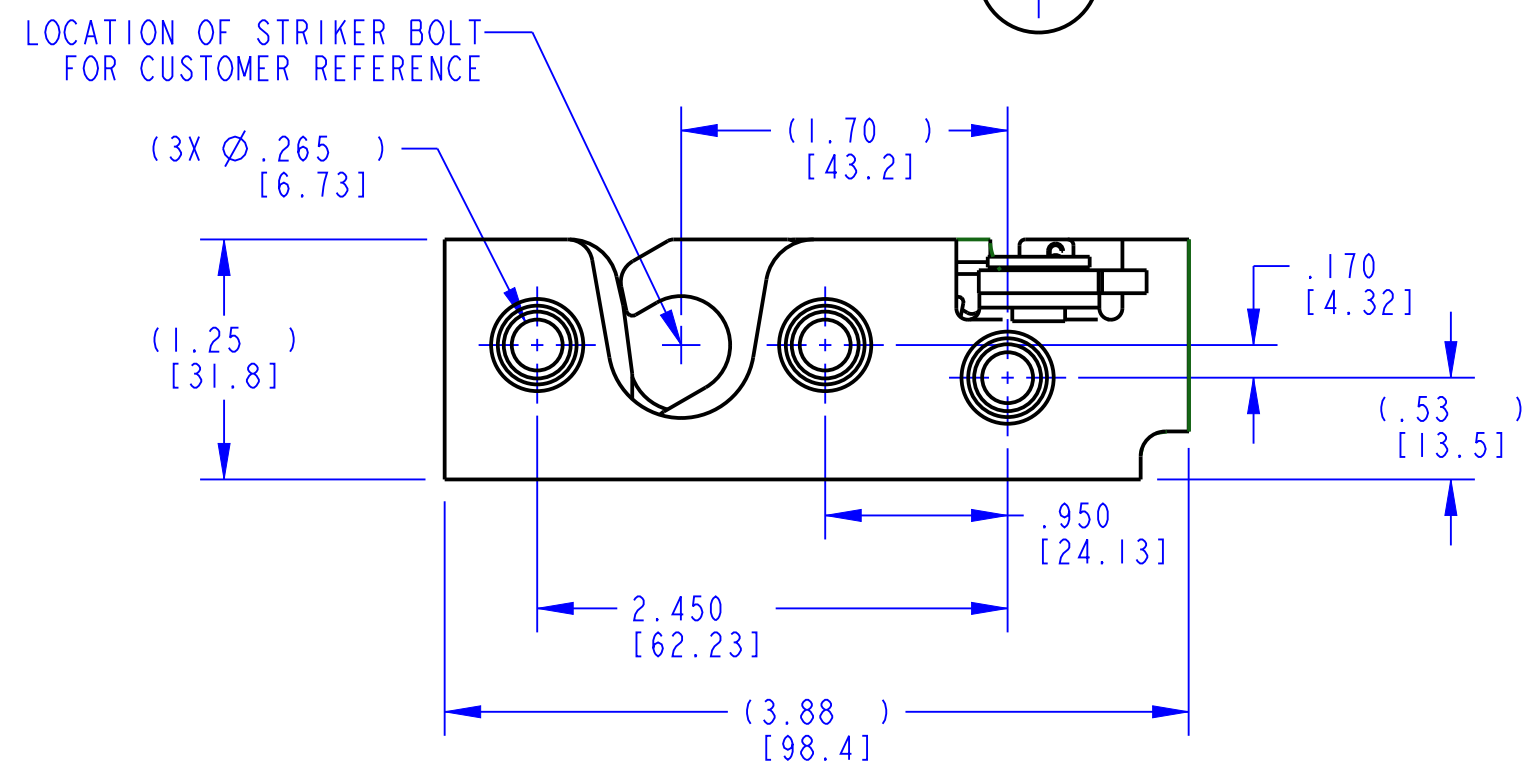
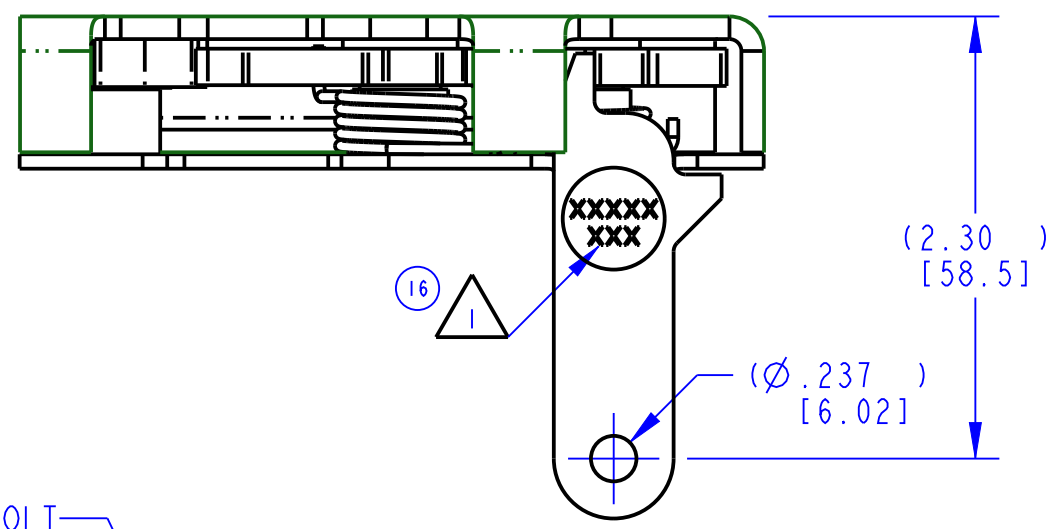
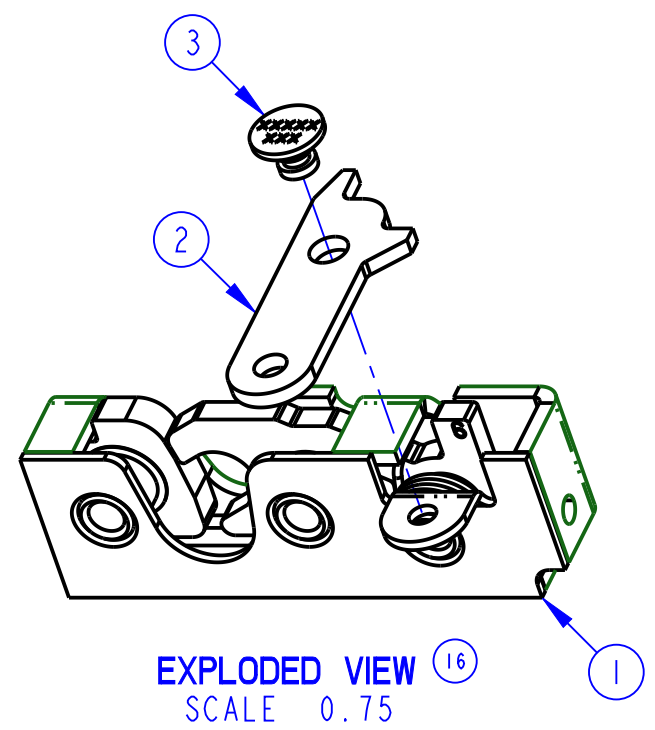




| PART NUMBER | ITEM 1<br>BASE LATCH<br>(QTY) | ITEM 2<br>LEVER<br>(QTY) | ITEM 3<br>RIVET<br>(QTY) | PART MARKING  |
|-------------|-------------------------------|--------------------------|--------------------------|---|
| 11189-16    | 0500200-63<br>(1) (16)        | 80934-16<br>(1)          | 80635-16<br>(1)          | <br>11189 |

| REVISION | ECN   | ECN BY         | DESCRIPTION   |
|----------|-------|----------------|---|
| 15       | 19660 | MLH<br>9/11/03 | REDRAWN TO NEW STANDARD   |
| 16       | 39545 | RLO<br>11-3-16 | BOM (ITEM 1); 0500200-63 WAS 0500200-01. ADDED NOTE 2,3,4,5; ENVELOPE/MOUNTING DIMENSIONS; PART MARKING COLUMN; EXPLODED VIEW. UPDATED DESCRIPTION, PART MARK, DRAWING FORMAT, PART NUMBER (REMOVED -XX). |



NOTES: UNLESS OTHERWISE SPECIFIED;

-  IDENTIFY ASSEMBLY WITH PART NUMBER AND DATE CODE APPROXIMATELY AS SHOWN, OR IN OTHER APPROVED LOCATIONS AS OUTLINED IN ES-121. ORIENTATION OF THE RIVET CONTAINING PART NUMBER AND DATE CODE NOT IMPORTANT.
- (16) 2. USE WITH TRIMARK'S Ø .500 STRIKER BOLT.
- (16) 3. TIGHTEN 1/4-20 GRADE 5 (OR BETTER) OR M6X1 CLASS 8.8 (OR BETTER) MOUNTING FASTENERS TO THE FASTENER MANUFACTURER'S RECOMMENDED TORQUE VALUE; HOWEVER, DO NOT EXCEED 120 IN-LB [13.6 Nm].
- (16) 4. OPPOSITE HAND PART IS 11190-16.
- (16) 5. DIMENSIONS SHOWN IN [ ] ARE MILLIMETERS FOR REFERENCE ONLY.

|  |  |   |          |                  |
|--|--|---|----------|------------------|
| ● INDICATES REQUIRED ASSEMBLY INFORMATION.<br>(16) UOS: THE -00 VERSION SHALL BE THE UNFINISHED VERSION OF PART SHOWN.<br>UOS: ALL DIMENSIONS APPLY BEFORE COATING. (ASME Y14.5M, sec. 2.4.1)                              |  | <br>500 Bailey Avenue<br>P. O. Box 350<br>New Hampton, Iowa 50659 U.S.A.<br>Tel: 641-394-3188<br>Fax: 641-394-2392 |          |                  |
| <b>TOLERANCES UNLESS OTHERWISE SPECIFIED (UOS)</b><br>ASME Y14.5M-1994<br>INCH MILLIMETER<br>X.X = ±.1 X = ±3<br>X.XX = ±.03 X.X = ±.8<br>X.XXX = ±.010 X.XX = ±.25<br>ANGLES<br>X° = ±3°<br>X.X° = ±1.0°<br>X.XX° = ±.50° |  |   |          | DRAWN BY         |
|  DO NOT SCALE DRAWING<br>REF. T/M OP 4.20-2 FOR SUP. QUALITY REQ.<br>REF. T/M OP 4.20-3 FOR INT. QUALITY REQ.                         |  | CHECKED BY  | MLL      | 10/1/85          |
|  |  | PROJECT   | L82018-1 | PRODUCT CODE     |
| CUSTOMER   |  | CUSTOMER PART NUMBER  |          | DESCRIPTION (16) |
| PART WEIGHT  |  | SURFACE AREA  |          | SIZE             |
| (0.6 LB)   |  |   |          | B                |
|  |  |   |          | SCALE            |
|  |  |   |          | 1.0              |
|  |  |   |          | SHEET            |
|  |  |   |          | 1/1              |
|  |  |   |          | PART NUMBER (16) |
|  |  |   |          | 11189            |

This drawing and the information contained herein is the property of TriMark Corporation and shall not be used for any purpose without our written consent.

DESCRIPTION (16)  
050-0200, RH, 2POSN, .265, STR, IPT

SIZE B SCALE 1.0 SHEET 1/1 PART NUMBER (16) 11189